OV VORTICE

VORTICE LINEO 100 QUIET (17160)

GENERAL DATA



Sound-proof mixed flow extractor fans


Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.

Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.

Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct)

Speed controllable by Vortice controllers.

PERFORMANCE CURVE

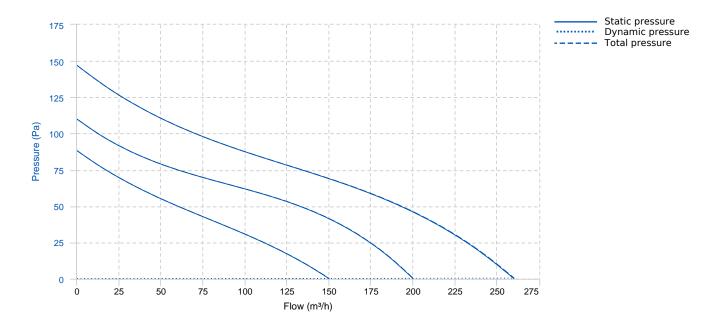


TECHNICAL DATA


| Fan | | | | |
|----------------|--------|-----------|----------|--|
| Approx. weight | 3.8 kg | Max. Flow | 260 m³/h | |




OV VORTICE

DIMENSIONS







| Dimensions (mm) | | | | | | | | | | | | |
|-----------------|-----|---|-------|---|------|---|-----|----|-----|--|--|--|
| А | 210 | В | 294.5 | С | 639 | Е | 130 | F | 235 | | | |
| G | 135 | Н | 120 | L | 67.5 | N | 320 | ØD | 97 | | | |
| ØM | 5.5 | | | | | | | | | | | |

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES PLEASE SEE THE USER MANUAL

ACCESSORIES

SENSOR

C TEMP (temperature sensor)

REF: 12992

SENSOR

C HCS (humidity sensor)

REF: 12994

SENSOR

v9.0.2

C TIMER REF: 12999 ENSOR

C SMOKE (smoke sensor)

REF: 12993

SENSOR

C PIR (passive infrared sensor)

REF: 12998

CONTROLLER

C 1.5 (electronic speed controller)

REF: 12966





CONTROLLER C 5 0,5 (5 speed controller) REF: 12987



3